

更改 REV	变更内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	版面发行	2012/10/29	JDL	Oscar

NOTES:

MATERIALS:

PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0.

CONTACTS: PHOSPHOR BRONZE

PLATING: GOLD PLATING OVER NICKEL IN CONTACT.

TIN PLATING OVER NICKEL IN SOLDER AREA.

SHIELDED: BRASS WITH NICKEL PLATED

Electrical:

- 1.Voltage Rating:125 Vac Rms.
- 2.Current Rating:1.5 Amp.
- 3.Contact Resistance:40 Milliohms Max.
- 4 insulation Resistance:1000 Megohms Min @500 Vdc.
- 5.Dielectric Strength:1000 Vac Rms 60Hz, 1Min.

Mechanical:

- 1.Operating:750 Cycles Min.



Environmental:

- 1.Storage:-40°C To +85°C.
- 2.Operation:-20°C To +75°C.

Mates With Modular Plug Conforming To FCC Part 68, Subpart F.

PART NUMBER: 52C-S1188-H3X

GOLD PLATING U"
1-3u" 2-6u" 3-15u" 4-30u"

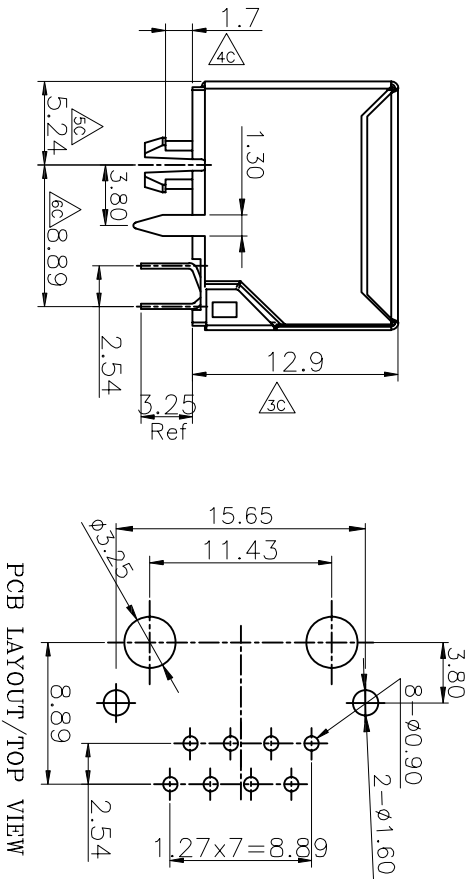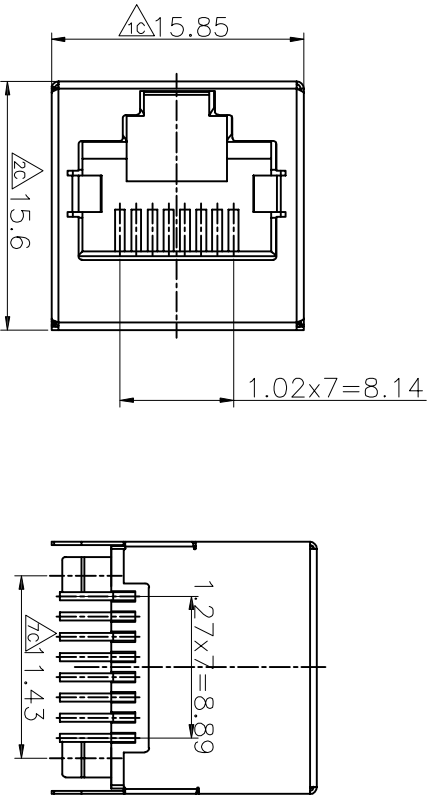

HTTP://WWW.RJ45JACK.COM		YOU LONG CONNECT THE WORLD	
:Cp/Cpk and SPC Control Item		YOU LONG ELECTRONICS LIMITED	
DIMENSION IN mm [Inch]		TITLE	
TOLERANCE UNLESS OTHERWISE SPECIFIED		S2C 1X1 8P8C PCB JACK WITH SHIELDED	
.X± 0.20 X*± 1"		H=12.9MM,TOP ENTRY,FLAT PIN	
.XX± 0.15 .X*± 0.5"		DRAWN	
.XXX± 0.075		Oscar	
APPROVE		SCALE	
CHECK		1:1	
		SIZE	
		A3	
		REV	
		1	
		A	