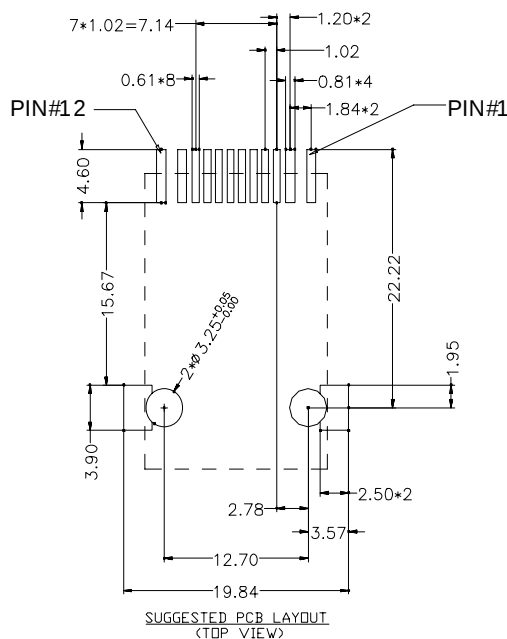
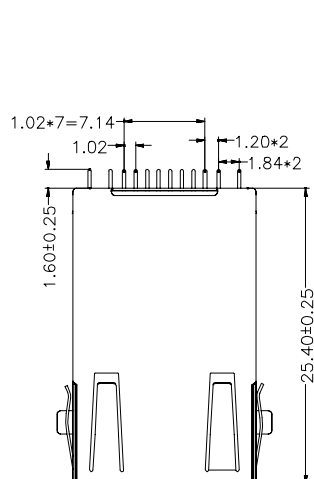
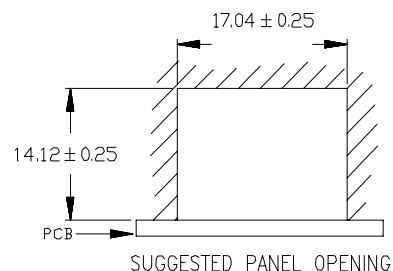
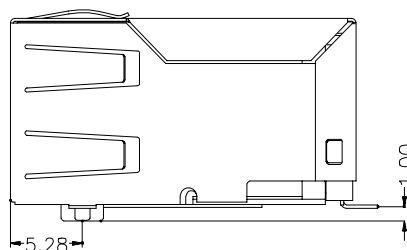
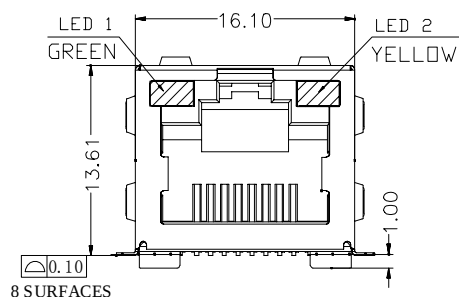


ELECTRICAL SPECIFICATIONS @ 25°C±5°C unless otherwise noted:

Insertion Loss: 1-100MHZ -1.0dB MAX

Return Loss: 1-30MHZ -16.0dB MIN

30-60MHZ -14.0dB MIN

60-80MHZ -10.0dB MIN

Cross Talk: 1-30MHZ -40.0dB MIN


30-60MHZ -35.0dB MIN

60-80MHZ -30.0dB MIN

CMR: 1-100MHZ -35.0dB MIN

Hi-Pot: 1500v AC 6S 1mA

OCL: 350uH MIN @ 100KHZ 100mV 8mA DC

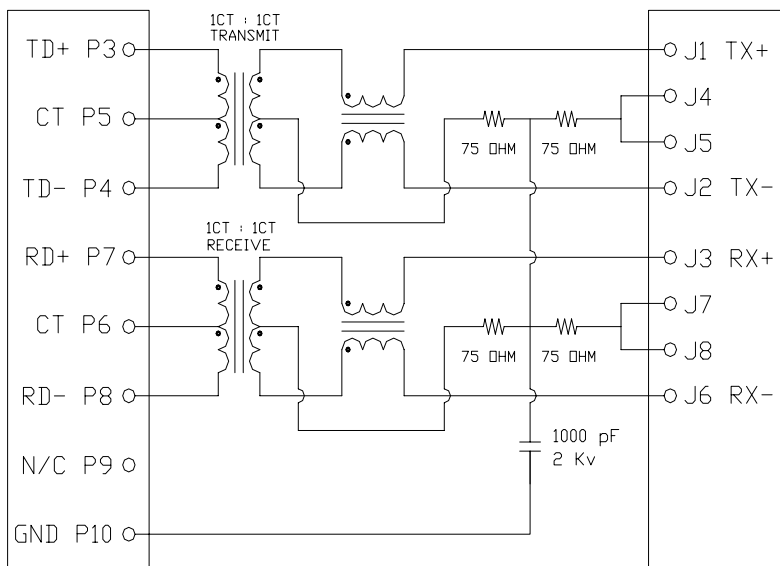

Contacts: 0.35mm thick phos bronze plated with 6u' gold in contact area

Turn Ratio: 1CT:1CT±3%

Operating temperature range: 0°C to +70°C

Housing Material: LCP Black



Drafted by CZ Lin

UNIT: mm

.xx +/-0.25 .xxx +/-0.13

**10/100BASE SMT
1X1Tab-Up RJ45**

Approved By : Herman Au

P/N:HRJ-YL1B011M2354MNL

Sheet 1 of 1

REV.
A