
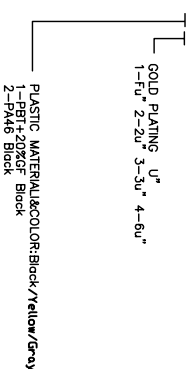
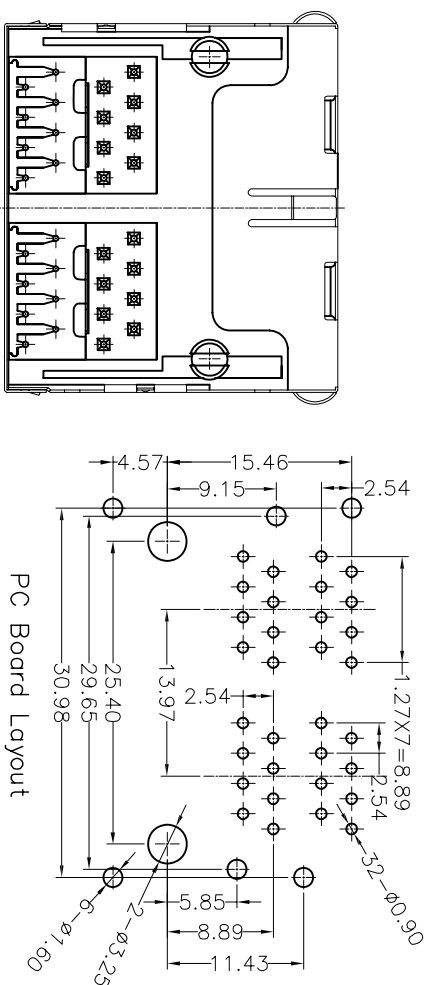


REV	变更内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	版面发行	2012/10/29	JDL	Oscar

NOTES:

- MATERIAL:
1. HOUSING MATERIAL : GLASS FILLED POLYESTER(U194V-0).
 2. CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$ (C5100).
 3. PLATING : GOLD PLATING OVER NICKEL.
 4. SHIELD: COPPER ALLOY 0.20mm THICKNESS PLATING NI.
- ELECTRICAL:
1. VOLTAGE RATING : 125 VAC RMS.
 2. CURRENT RATING : 1.5 AMP.
 3. CONTACT RESISTANCE : 50 MILLIOHMS MAX.
 4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC.
 5. DIELECTRIC WITHSTANDING RESISTANCE : 1000V AC RMS 50Hz. 1MIN.
- MECHANICAL:
1. DURABILITY : 750 CYCLES MIN.
 2. PCB RETENTION PRE-SOLDER : 1 LB MIN.
- ENVIRONMENTAL:
1. STORAGE : -40°C TO +85°C.
 2. OPERATION : 0°C TO 70°C.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: 59A-S22888A-E1XX

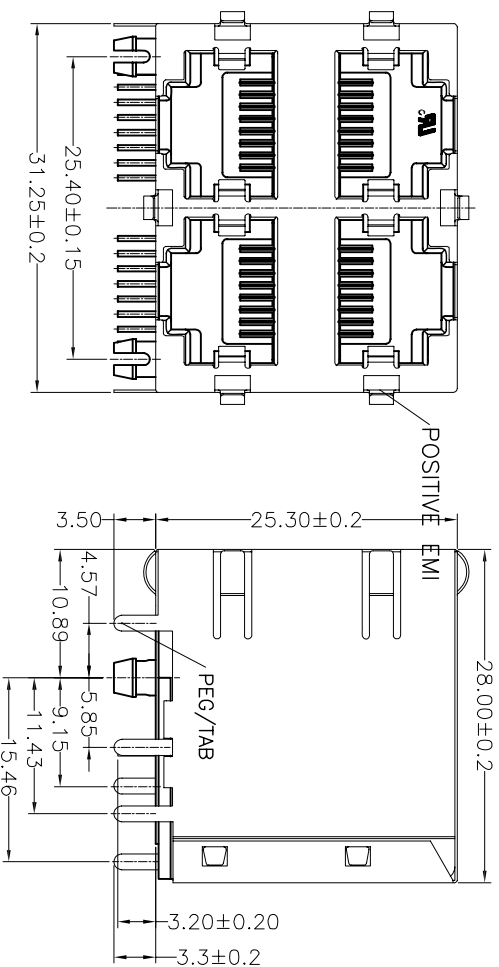

HTTP://WWW.RJ45JACK.COM

YOU LONG CONNECT THE WORLD

YOU LONG ELECTRONICS LIMITED

DIMENSION IN mm [Inch]		TOLERANCE UNLESS OTHERWISE SPECIFIED	
.XX±0.20	X.±1"	.XX±0.15	X.±0.5"
XXXX±0.075			

QC	: Inspection Item	CPK	: Cp/Cpk and SPC Control Item
DATE	DATE	SCALE	SCALE
APPROVE	APPROVE	SIZE	SIZE
DRW	DRW	REV	REV
Oscar	Oscar	1	1

If you have any questions, Don't hesitate to email sales@rj45jack.com, please!