


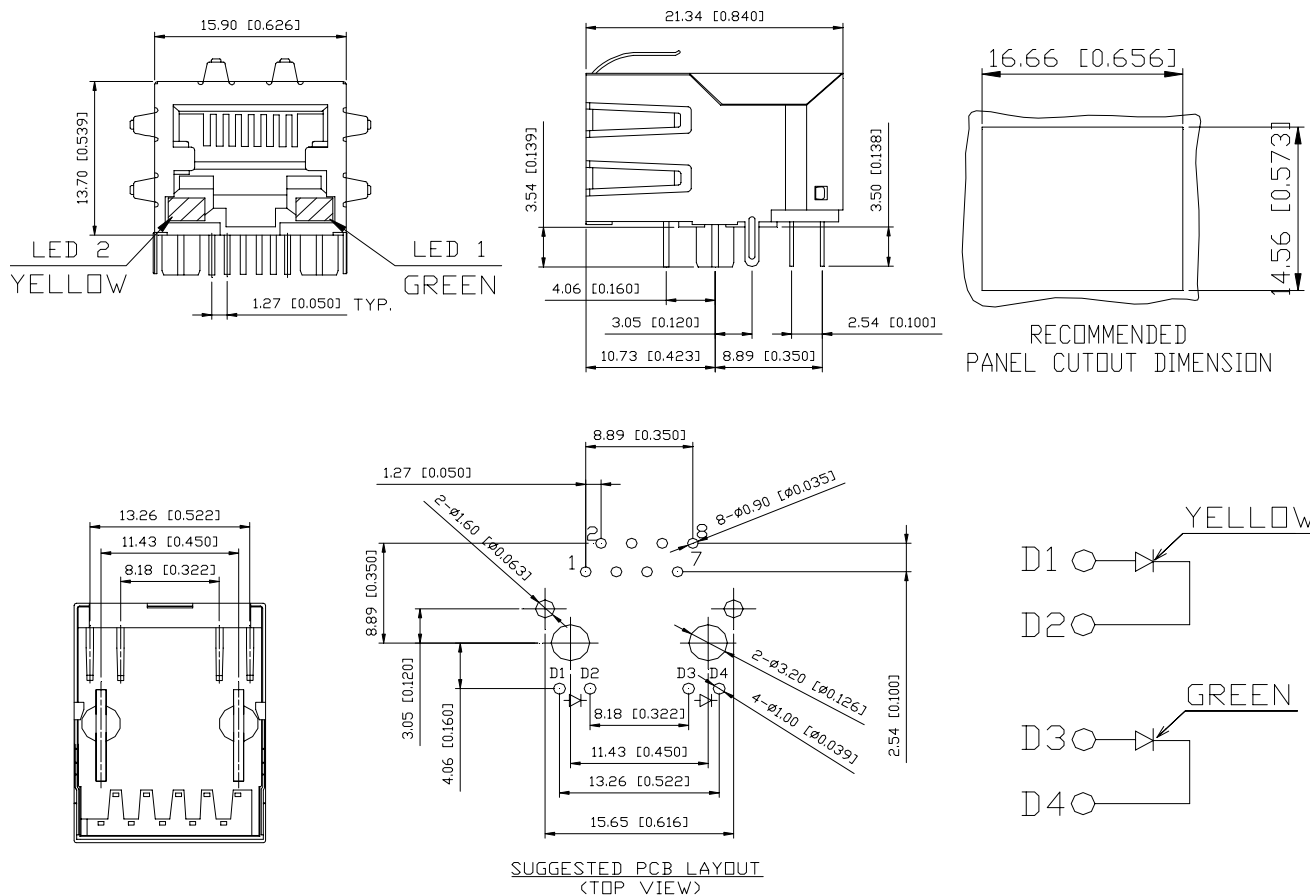

## **ELECTRICAL SPECIFICATIONS @ 25°C±5°C unless otherwise noted:**

**Insertion Loss: 1-100MHZ -1.0dB MAX**

**Return Loss:** 1-30MHZ -16.0dB MIN  
30-60MHZ -14.0dB MIN  
60-80MHZ -10.0dB MIN

**Cross Talk:** 1-30MHZ -40.0dB MIN  
30-60MHZ -35.0dB MIN  
60-80MHZ -30.0dB MIN

**CMR:** 1-100MHZ -35.0dB MIN

**Hi-Pot:** 1500v AC 6S 1mA


**OCL:**350uH MIN @ 100KHZ 100mV 8mA DC

**Turn Ratio:** 1CT:1CT±/-3%

**Contacts:** 0.35mm thick phos bronze plated with 6u' gold in contact area

**Operating temperature range:** -40°C to +85°C

**Housing Material:** PBT Black

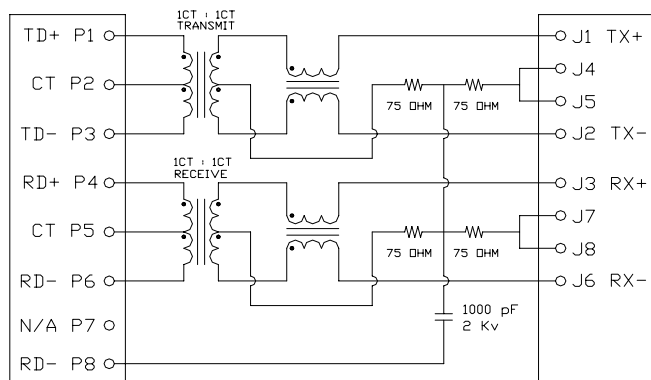

**Elecpart**  
友隆电子

Drafted by Lin Ye

UNIT: mm

.xx +/-0.25 .xxx +/-0.13

10/100BASE  
1X1Tab-Down RJ45

Approved By :Joan Pan

P/N:HRJ-YL1B11M2124SNL

REV.  
A

Sheet 1 of 1